



TH-125

MONOGAS

AIRE o N₂

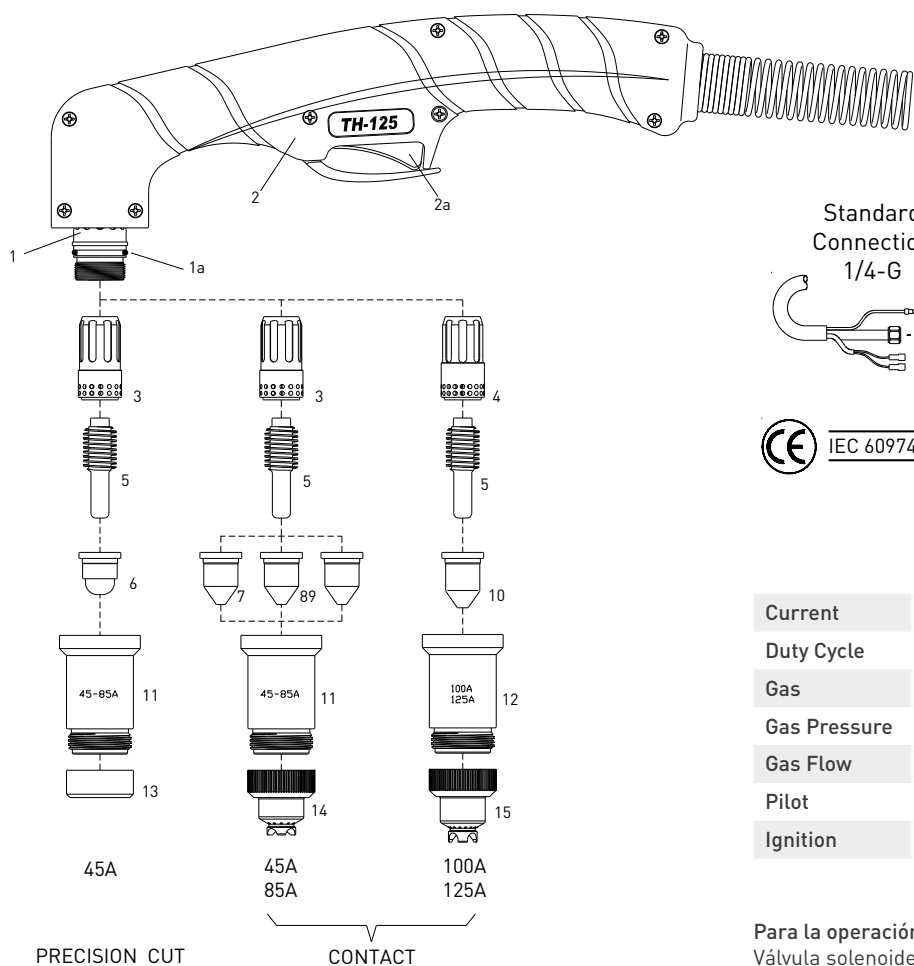

Standard Connection
1/4-G



Current	40-125 Amps
Duty Cycle	125 Amps at 60%
Gas	Air/N ₂
Gas Pressure	72-87 PSI (5.0-6.0 bar)
Gas Flow	630 SCFH (295 lpm)
Pilot	Electrode to Tip (18-22A)
Ignition	Without HF

Para la operación correcta, utilice:
Válvula solenoide de 3 vías, orificio interior
4.5-5.5mm - (0.178-0.217 inches)

PIEZAS DE REPUESTO

ITEM	REFERENCIA	DESCRIPCIÓN
PIEZAS DE LA ANTORCHA		
1	CS03700	TH-125 Hand Torch Head
1a	CS01035.60	O-Ring
2	CS03705	Handle with Switch
2a	CS07301.20	Switch
3	CS60042	Swirl ring, 45-85A Maximum Life
4	CS60040	Swirl ring, 100-125A Maximum Life
5	CS52677	Electrode, 45-125A
6	CS51415	Tip, Cutting, 45A Precision Cut
7	CS51416	Tip, Cutting, 45A
8	CS51417	Tip, Cutting, 65A
9	CS51418	Tip, Cutting, 85A
10	CS51419	Tip, Cutting, 105A
	CS51419.16	Tip, Cutting, 125A
11	CS60309TA	Shield Cup Body, 45-85A
12	CS60309TC	Shield Cup Body, 100-125A
13	CS51928	Deflector, 45A Precision Cut
14	CS51921	Shield Cap, Hand, 45-85A
15	CS51926	Shield Cap, Hand, 100-125A

REFERENCIA	DESCRIPCIÓN
ANTORCHAS Y CABLES	
CS03720CX	TH-125 Hand Torch, 6m (20 ft) Leads, Coaxial Cable
CS03725CX	TH-125 Hand Torch, 12m (40 ft) Leads, Coaxial Cable
CS03780CX	TH-125 Lead Assembly, Hand, 6m (20 ft) Length, Coaxial Cable
CS03785CX	TH-125 Lead Assembly, Hand, 12m (40 ft) Length, Coaxial Cable

ITEM	REFERENCIA	DESCRIPCIÓN
ACCESORIOS		
N/S	CS51853	Circle Cutting Attachment

Antorchas con cables de diferentes cubiertas y conector central disponible bajo petición.

